



## 85 2 and 3-Lite Aluminum Sliding Window

### Features:

- Aluminum frame and sash components are precision cut and assembled to make joints weather-tight
- Warm-edge insulated glass reduces condensation and improves thermal efficiency
- Sashes interlock for added strength and security
- Positive sash lock provides security and helps keep the frame and sash weather-tight
- Half screen standard
- Continuous extruded nail-fin on all frame sections for fast, easy installation
- Sloped-sill allows for easy water run-off
- Jamb depth: 2.147"

### Custom Options:

- 5/8" or 3/4" flat grids available
- Glass options: Low-E Glass; Low-E Glass with Argon Gas; Ultra Low-E Argon
- Custom sizes available
- DP Rating R40 (window size tested 72" x 48")

### Product Performance:

AAMA 101 Results:

Window Size	AAMA Rating (psf)	Air (cfm/ft <sup>2</sup> )	Water (psf)
72" x 72" (XO)	R15	0.16	2.92
72" x 48" (XO)	R15	0.16	6.06
72" x 48" (XO)	R40	0.12	6.06

### Product Dimensions:

Aluminum Wall Thickness: 0.050"  
 Glass Thickness: 0.625"  
 Jamb Depth: 2.147"  
 Nail Fin Setback: 1.375"

### Rough Opening:

Window Width + 1/2"  
 Window Height + 1/2"

### 2-Lite Slider Size Restrictions:


	Min:	Max:
Width	23 1/2"	72"
Height	11 1/2"	72"

(Max. United Inches 132")

### 3-Lite Slider Size Restrictions:

	Min:	Max:
Width	71 1/2"	108"
Height	23 1/2"	60"

(Max. United Inches 158")

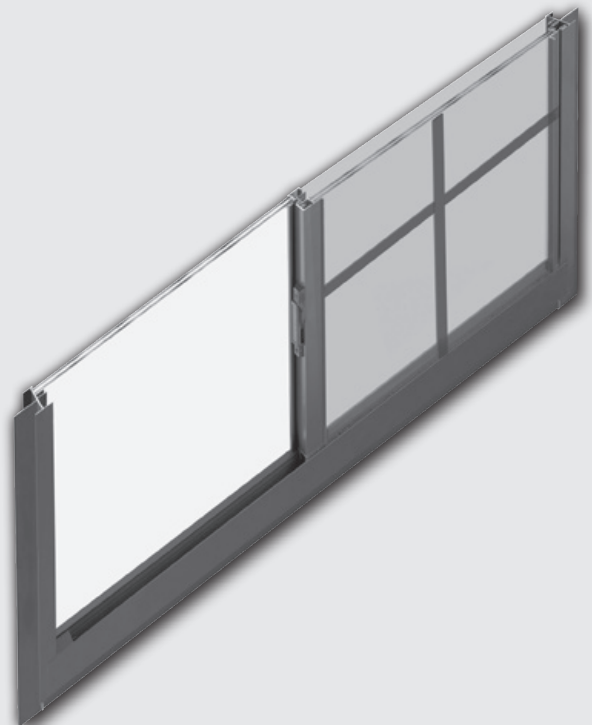



## 85 2 and 3-Lite Aluminum Sliding Window

### Egress Formulas:

Egress Width Formula =  $(\text{Window Width}/2) - 1.75''$  (XO/OX)

Egress Height Formula =  $\text{Window Height} - 2.625''$  (std. sill)

Area =  $(\text{Egress Width} \times \text{Egress Height})/144$

### Screen Sizes:

Width: XO/OX =  $(\text{window width}/2) - 1.00''$

XOX 1/3 1/3 1/3 =  $(\text{window width}/3) - 1.00''$

XOX 1/4 1/2 1/4 =  $(\text{window width}/4) - 1.00''$

Height:  $\text{window height} - 1.25''$

### Cross Sections:

