

350C Casement Window

Features:

- Casements easily open with a low-profile operator handle to provide ventilation or for cleaning
- Features a heavy duty 3-1/4" or 2-3/4" multichambered frame
- · Superior weatherability from the welded frame and sash corners
- · Protects against air and water infiltration with a double weather-strip design
- · Locks provided a tight seal for security from forced entry
- Structural integrity provided by steel reinforcement
- · Easily removable full screens mount on the interior of the window
- Casement Design Pressure (DP) rating of 45 (window size tested 36-in x 72-in)
- · Many high-performance glass options to meet your region's requirements
- · Limited Lifetime Warranty for peace of mind

Product Performance:

AAMA 101 Results:

Window Size	AAMA Rating (psf)	Air (cfm/ft^2)	Water (psf)
36" x 72"	PG45	0.06	15.04
36" x 72" FVS	PG30	0.03	4.59

Product Dimensions:

Vinyl Wall Thickness: 0.071"

Glass Thickness: 0.750" or 1"
Jamb Depth: 3.25" or 2.75"

Nail Fin Setback:


1.25" flange set back 3.25" width 1.375" flange set back 2.75" width

Rough Opening:

Window Width + 1/2" Window Height + 1/2"

Size Restrictions:

	Min:	Max:
Width	16"	3'
Height	16"	6'

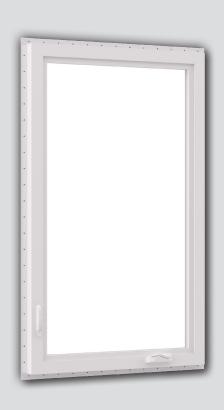




350C Casement Window

Screen Formulas:

Vent Width minus 5.875" Vent Height plus 5.875"

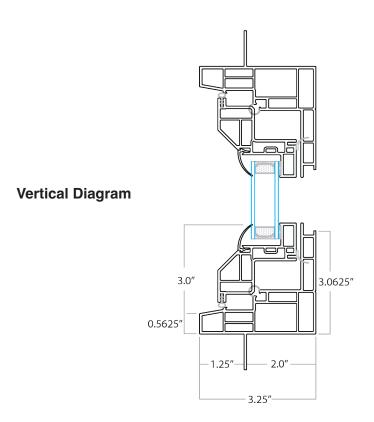

Horizontal Diagram

