

350C Single Hung Window

Features:

- Side-load window with a smooth-sliding bottom sash for effortless operation and easy maintenance
- Features a heavy duty 3-1/4" or 2-3/4" multichambered frame
- Safe and easy open and close with contoured pull rails
- Superior weatherability from the welded frame and sash corners
- Protects against air and water infiltration with a double weather-strip design
- Cleaning is a breeze window sashes that remove from the inside
- Forced entry security from cam-action locks that provide a tight seal
- Structural integrity provided by steel reinforcement
- Single Hung Design Pressure (DP) rating of 40 (window size tested 36" x 60")
- Many high-performance glass options to meet your region's requirements
- Limited Lifetime Warranty for peace of mind

Product Performance:

AAMA 101 Results:

Window Size	AAMA Rating (psf)	Air (cfm/ft ²)	Water (psf)
48" x 72"	PG40	0.08	6.06

Product Dimensions:

Vinyl Wall Thickness:	0.071"
Glass Thickness:	0.750"
Jamb Depth:	3.25" or 2.75"
Nail Fin Setback:	
1.25" flange set back	3.25" width
1.375" flange set back	2.75" width

Rough Opening:

Window Width + 1/2"
Window Height + 1/2"

Size Restrictions:

	Min:	Max:
Width	18"	4'
Height	30"	8'



350C Single Hung Window

Egress Formulas:

Clear opening width = (NFD Width) - 3"


Clear opening height = (NFD Height)/2 - 4.125"

Screen Formulas:

Vent Width minus 1.8125"

Vent Height/2 minus 1.1875"

Vertical Diagram

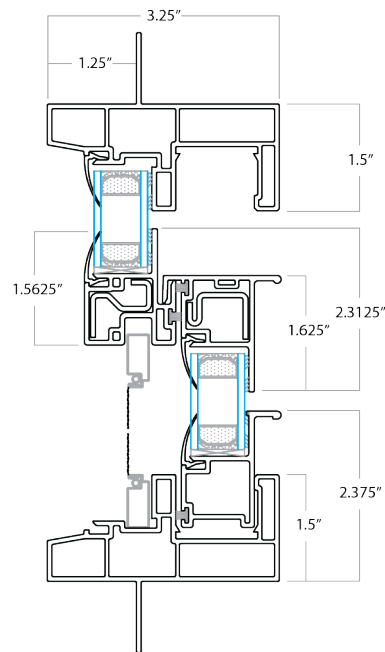

Horizontal Diagram

